


## Verti-Drain® 2519

The all-new 2519 Verti-Drain® combines robustness with versatility. This high-speed model can achieve a maximum working depth of 10"/250 mm with a range of tines, while offering unrivalled productivity; this makes the 2519 the obvious choice for applications where agility and productivity are key.

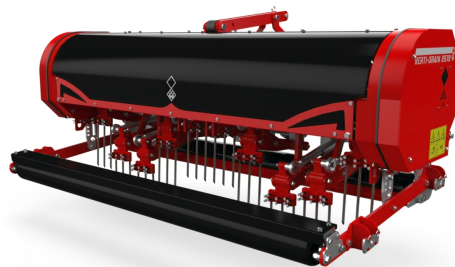

### Specifications

SKU	111.251.904
Operation	Tractor Mounted
Working width (m)	1.95
Working width (inch)	76.7
Max. Working depth (mm)	250
Max. Working depth (inch)	10
Working speed at hole spacing 65 mm (km h)	1.79
Working speed at hole spacing 2 1 2 inch (mph)	1.1
Weight (kg)	900
Weight (lbs)	1984
Max. Diameter solid tine (mm)	18 x 250
Max. Diameter solid tine (inch)	3/4 x 10
Max. Diameter hollow tine (mm)	25 x 250
Max. Diameter hollow tine (inch)	1 x 10
Min. Tractor HP required	60
Max. capacity with spacing 65 mm (m <sup>2</sup> hr)	3490
Max. capacity with spacing 2 1 2 inch (ft <sup>2</sup> hr)	37566
Three-point hitch	3-Point CAT 1/2
Rpm Max.	540
Gearbox oil	80W90 - 1.2 (0.31 gallon)
Lubricant	EP 2
Dimensions (width mm)	2314
Dimensions (height mm)	963
Dimensions (length mm)	1250
Dimensions (width inch)	91.1
Dimensions (height inch)	37.9
Dimensions (length inch)	49.2
Slip clutch setting	550 Nm (4868 lbf-in)
Number of rakes	920

### Distributed by:



[www.centaur-asiapacific.com](http://www.centaur-asiapacific.com)  
[info@centaur-asiapacific.com](mailto:info@centaur-asiapacific.com)

\*Hong Kong, Macau, Malaysia (Johor).