


Verti-Drain® 7626

The 7626 is the largest Verti-Drain in the range, with a heavy-duty gearbox & hydraulic depth control to allow for working depth changes on the move. It is well suited to the toughest of soil conditions, with a 102"/260 cm working width it has the ability to cover large areas with ease.

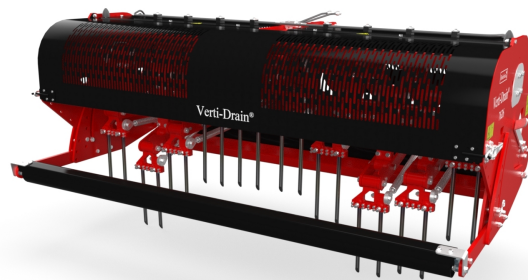

Specifications

SKU	7626
Operation	Tractor Mounted
Working width (m)	2.6
Working width (inch)	102
Max. Working depth (mm)	400
Max. Working depth (inch)	16
Weight (kg)	2010
Weight (lbs)	4431
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 24 mm tines (mm)	129
Hole distance with 1 x 16 inch tines (inch)	5
Hole spacing distance driving direction (mm)	50-195
Hole spacing distance driving direction (inch)	2 - 7-1/2
Max. Diameter solid tine (mm)	24 x 400
Max. Diameter solid tine (inch)	1 x 16
Max. Diameter hollow tine (mm)	32 x 300
Max. Diameter hollow tine (inch)	1-1/4 x 12
Min. Tractor HP required	65
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	2300
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	5070
Max. capacity with spacing 65 mm (m ² hr)	1950
Max. capacity with spacing 2 1 2 inch (ft ² hr)	20989
Three-point hitch	3-point CAT 2
Rpm Max.	500
Gear case oil	80W90 - 6.5
Lubricant	EP2
Slip clutch setting	1100 Nm

Distributed by:



www.centaur-asiapacific.com
info@centaur-asiapacific.com

*Hong Kong, Macau, Malaysia (Johor).